

BIG LUG™
DUMP TRAILERS

HD SERIES DUMP TRAILER



There are dump trailers that make big claims but then fall short on performance. Then there's BigLug HD. Professionally engineered and fortified to take on your toughest hauling jobs. Go ahead, compare others, but make no mistake – BigLug HD is unlike any trailer on the market. Move heavy equipment, large loads, supplies, debris – take it on, haul it out - no big deal. BigLug is tough, durable, dependable and powder coated with a super strong finish for that great over-the-road look. Tackle multiple jobs from light excavating work to heavy payloads with just one man, one truck, one trailer. BigLug handles the most cumbersome loads and withstands the rigors of heavy hauling. Finally, there's a dump trailer that stands-up to your big demands. BigLug – it's the new big deal.

BigLug™ HD SERIES SPECIFICATIONS



DOUBLE ACTING HYDRAULIC CYLINDERS FOR STABLE DUMPING



BARN DOORS ALLOW CLEAR OPENING & FULL ACCESS FOR EQUIPMENT




27" LOW PROFILE DECK HEIGHT FOR EASY & SAFE EQUIPMENT HAULING



2-IN-1 TAILGATE FEATURES MECHANICAL LEVERS FOR SAFETY



OPTIONS INCLUDE TARP, SPARE TIRE, HYDRAULIC JACK, PALLET FORK CARRIER

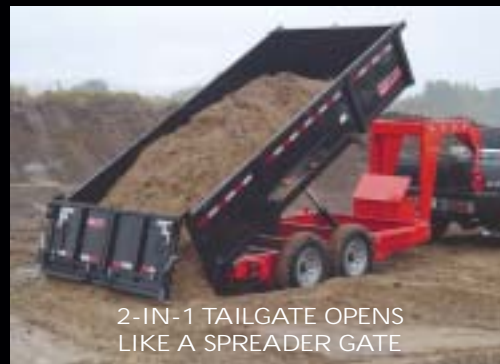

2-IN-1 TAILGATE OPENS LIKE A SPREADER GATE

Models	CT1414HD	CR1414HD	
HITCH	Tag Along	Tag Along	Gooseneck
GVWR	15,580 lbs.	15,580 lbs.	17,060 lbs.
EMPTY WEIGHT	4,380 lbs.	4,580 lbs.	4,960 lbs.
PAYLOAD/DUMP CAPACITY	11,200 lbs.	11,000 lbs.	12,100 lbs.
AXLE SPECS	2 Dexter 7K	2 Dexter 7K	2 Dexter 7K
AXLE CONFIGURATION	4" Drop	4" Drop	4" Drop
ELECTRIC BRAKES	Both Axles	Both Axles	Both Axles
RIMS	8 on 6.5 Silver Mod	8 on 6.5 Silver Mod	8 on 6.5 Silver Mod
RADIAL TIRES	ST 235 80 R16E	ST 235 80 R16E	ST 235 80 R16E
TIRE RATING	3,520 lbs. Each	3,520 lbs. Each	3,520 lbs. Each
MODULAR WIRING	100% Sealed	100% Sealed	100% Sealed
12 V TRICKLE CHARGER	Yes	Yes	Yes
BREAK AWAY SYSTEM	Yes	Yes	Yes
LED LIGHTS	Yes	Yes	Yes
QUAD TAILLIGHTS	Yes	Yes	Yes
TRAILER PLUG	7 Round RV	7 Round RV	7 Round RV
DEEP CYCLE BATTERY	Yes	Yes	Yes
HYDRAULIC PUMP	Double Acting	Double Acting	Double Acting
HOIST CYLINDERS	Dual	Dual	Dual
CONTROL CORD	25' Cord	25' Cord	25' Cord
INSIDE BOX DIMENSIONS	24"H x 80"W x 14'L	24"H x 80"W x 14'L	24"H x 80"W x 14'L
DECK HEIGHT	27"	27"	27"
DUMP BODY FRAME	4"x 2" Rectangular Tube Top and Bottom	4"x 2" Rectangular Tube Top and Bottom	4"x 2" Rectangular Tube Top and Bottom
DUMP BODY	11 Ga. High Strength	11 Ga. High Strength	11 Ga. High Strength
CENTER FLOOR SEAM	Full Weld	Full Weld	Full Weld
D RINGS	(4) Welded in Corners	(4) Welded in Corners	(4) Welded in Corners
STAKE POCKETS	Yes	Yes	Yes
BODY PROPS	2	2	2
6' PULL OUT RAMPS	Yes	Yes	Yes
LOAD STABILIZERS	Yes	Yes	Yes
UNIVERSAL TAILGATE	Barn Doors/Spreader/ Dump Gate	Barn Doors/Spreader/ Dump Gate	Barn Doors/Spreader/ Dump Gate
2 5/16" ADJ. COUPLER	Yes	Yes	Yes
BOLT-ON JACK	7K Dropleg Top Wind	12K Dropleg Side Wind	12K Dropleg Side Wind
POWDER COAT FINISH	Yes	Yes	Yes

NOTE: Options added to a base trailer will decrease the payload by an amount equal to the weight of the options added. Payload/dump capacity for CG1414HD based upon the load center of gravity being 9" forward of the box centerline. Any HD series trailer shipped with the optional 8k axles provide an additional payload capacity of 2,300 lbs. for Tag Along models and 2,600 lbs. for Gooseneck models.



CUSTOM TRAILER WORKS A Division of Cubic Designs, Inc.

Corporate Headquarters
16770 W Victor Road
New Berlin, WI 53151
800-826-7061
Fax 262-789-1970

Manufacturing Plant
1977 State Hwy 22/54
Waupaca, WI 54981
800-242-7061
Fax 715-256-9752

National Sales Office
W8570 Cloverleaf Lake Rd
Clintonville, WI 54929
715-823-2795
Fax 715-823-2795

Authorized Dealer